



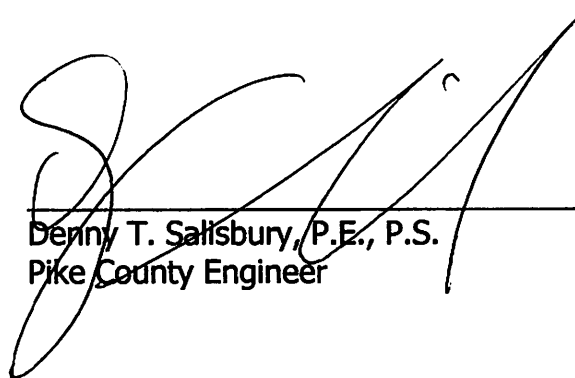
# ENGINEER'S ESTIMATE

**Project Name: Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)**

**Date set for completion: November 15, 2024**

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized			
					Unit Price		Total Amount	
					Dollars	Cents	Dollars	Cents
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	2,500	00
202	38000	262.5	FT.	Guardrail Removed	10	00	2,625	00
203	10000	142	CU. YD.	Excavation	20	00	2,840	00
203	20000	110	CU. YD.	Embankment	20	00	2,200	00
606	15200	262.5	FT.	Guardrail, Type MGS Half Post Spacing with Long Posts, (Steel)	50	00	13,125	00
659	10000	310	SQ. YD.	Seeding and Mulching	2	50	775	00
659	20000	0.04	TON	Commercial Fertilizer	1,500	00	60	00
659	31000	0.07	ACRE	Lime	1,500	00	105	00
601	32200	4	CU. YD.	Rock Channel Protection, Type C With Filter	150	00	600	00
605	14020	251	FT.	6" Base Pipe Underdrains with Geotextile Fabric	20	00	5,020	00
611	00510	32	FT.	6" Conduit, Type F for Underdrain Outlets	30	00	960	00
204	10000	294	SQ. YD.	Subgrade Compaction	10	00	2,940	00
204	45000	0.1	HOUR	Proof Rolling	325	00	32	50
252	01500	20	FT.	Full Depth Pavement Sawing	25	00	500	00
301	46000	40	CU. YD.	Asphalt Concrete Base, PG64-22	300	00	12,000	00
304	20000	44	CU. YD.	Aggregate Base	100	00	4,400	00
407	10000	12	GAL.	Tack Coat	10	00	120	00
411	10000	18	CU. YD.	Stabilized Crushed Aggregate	100	00	1,800	00
441	50000	10	CU. YD.	Asphalt Concrete Surface Course, Type 1, (448), PG64-22	300	00	3,000	00
441	50300	12	CU. YD.	Asphalt Concrete Intermediate Course, Type 2, (448)	300	00	3,600	00

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized			
					Unit Price		Total Amount	
					Dollars	Cents	Dollars	Cents
626	00110	3	EACH	Barrier Reflector, Type 2 (Bi-Directional)	20	00	60	00
507	00400	656	FT.	Steel Piles, Misc.: W18X40 Steel Beam	60	00	39,360	00
507	00410	2	EACH	Steel Piles, Misc.: W18X40 Steel Beam Splice	500	00	1,000	00
524	94703	381	FT.	Drilled Shafts, 36" Diameter, Above Bedrock, As Per Plan	200	00	76,200	00
524	94705	220	FT.	Drilled Shafts, 36" Diameter, Into Bedrock, As Per Plan	225	00	49,500	00
524	94803	312	FT.	Drilled Shafts, 42" Diameter, Above Bedrock, As Per Plan	175	00	54,600	00
103	05000	LUMP	LUMP	Premium For Contract Performance Bond and for Payment Bond	LUMP	SUM	7,500	00
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	10,000	00
623	10000	LUMP	LUMP	Construction Layout Stakes and Surveying	LUMP	SUM	10,000	00
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	15,000	00
<b>TOTAL ENGINEER'S ESTIMATE</b>							<b>322,422</b>	<b>50</b>



\_\_\_\_\_  
Denny T. Salisbury, P.E., P.S.  
Pike County Engineer

5-14-24  
Date

JACKSON TOWNSHIP,  
COUNTY OF PIKE, OHIO

SLIP REPAIR


BID PROPOSAL

"JACKSON TOWNSHIP-HICKSON RUN ROAD SLIP REPAIR,  
PIK-TR516-01.47,  
FEMA #109124, PW#401, (DR4424)"


LETTING DATE

MAY 20, 2024


11:00 A.M.

  
\_\_\_\_\_  
William M. Harbert

DATE 4-11-24

  
\_\_\_\_\_  
John D. Jackson

DATE 4-11-24

  
\_\_\_\_\_  
Johnny Cydrus

DATE 4-11-24

BIDDER

NAME: ANT Management Incorporated

STREET: 236 Stella Avenue

CITY: Peebles, OH 45660

The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

**Project Name: Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)**

**Date set for completion: November 15, 2024**

**GENERAL SUMMARY**

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	2,500.	00 ✓
202	38000	262.5	FT.	Guardrail Removed	5.	00	1,312.	50 ✓
203	10000	142	CU. YD.	Excavation	25.	00	3,550.	00 ✓
203	20000	110	CU. YD.	Embankment	25.	00	2,750.	00 ✓
606	15200	262.5	FT.	Guardrail, Type MGS Half Post Spacing with Long Posts, (Steel)	44.	00	11,550.	00 ✓
659	10000	310	SQ. YD.	Seeding and Mulching	10.	00	3,100.	00 ✓
659	20000	0.04	TON	Commercial Fertilizer	1,500.	00	60.	00 ✓
659	31000	0.07	ACRE	Lime	200.	00	14.	00 ✓
601	32200	4	CU. YD.	Rock Channel Protection, Type C With Filter	166.	67	666.	68 ✓
605	14020	251	FT.	6" Base Pipe Underdrains with Geotextile Fabric	2.	50	627.	50 ✓
611	00510	32	FT.	6" Conduit, Type F for Underdrain Outlets	142.	15	4,548.	80 ✓
204	10000	294	SQ. YD.	Subgrade Compaction	3.	50	1,029.	00 ✓
204	45000	0.1	HOUR	Proof Rolling	2,000.	00	200.	00 ✓
252	01500	20	FT.	Full Depth Pavement Sawing	8.	50	170.	00 ✓
301	46000	40	CU. YD.	Asphalt Concrete Base, PG64-22	250.	00	10,000.	00 ✓
304	20000	44	CU. YD.	Aggregate Base	85.	00	3,740.	00 ✓
407	10000	12	GAL.	Tack Coat	2.	50	30.	00 ✓
411	10000	18	CU. YD.	Stabilized Crushed Aggregate	85.	00	1,530.	00 ✓
441	50000	10	CU. YD.	Asphalt Concrete Surface Course, Type 1, (448), PG64-22	650.	00	6,500.	00 ✓



Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
441	50300	12	CU. YD.	Asphalt Concrete Intermediate Course, Type 2, (448)	291.	67	3,500.	04 ✓
626	00110	3	EACH	Barrier Reflector, Type 2 (Bi-Directional)	11.	00	33.	00 ✓
507	00400	656	FT.	Steel Piles, Misc.: W18X40 Steel Beam	30.	00	19,680.	00 ✓
507	00410	2	EACH	Steel Piles, Misc.: W18X40 Steel Beam Splice	175.	00	350.	00 ✓
524	94703	381	FT.	Drilled Shafts, 36" Diameter, Above Bedrock, As Per Plan	108.	57	41,365.	17 ✓
524	94705	220	FT.	Drilled Shafts, 36" Diameter, Into Bedrock, As Per Plan	188.	01	41,362.	20 ✓
524	94803	312	FT.	Drilled Shafts, 42" Diameter, Above Bedrock, As Per Plan	132.	58	41,364.	96 ✓
103	05000	LUMP	LUMP	Premium For Contract Performance Bond and for Payment Bond	LUMP	SUM	2,500.	00 ✓
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	5,000.	00 ✓
623	10000	LUMP	LUMP	Construction Layout Stakes and Surveying	LUMP	SUM	5,000.	00 ✓
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	5,000.	00 ✓
<b>BID TOTAL</b>							219,033.	85 ✓

5/20/24  
CSG  
OK

State total amount in words Two hundred nineteen thousand  
thirty-three Dollars and eighty-five cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: May 19, 2024

Steven Partin, Owner of ANT Management Incorporated  
Name and Address of President if bidder is a Corporation

Melissa Partin, Secretary of ANT Management Incorporated  
Name and Address of Secretary if bidder is a Corporation

Name of Firm: ANT Management Incorporated

By: Steven Partin  Steven Partin



Title: Owner of ANT Management Incorporated

Firm Address: 236 Stella Avenue  
Peebles, OH 45660

Tax I.D. # Omitted Fed. Tax ID #

JACKSON TOWNSHIP,  
COUNTY OF PIKE, OHIO

SLIP REPAIR

BID PROPOSAL

"JACKSON TOWNSHIP-HICKSON RUN ROAD SLIP REPAIR,  
PIK-TR516-01.47,  
FEMA #109124, PW#401, (DR4424)"

LETTING DATE

MAY 20, 2024

11:00 A.M.

x William M. Harbert  
William M. Harbert

DATE x 4-11-24

x John D. Jackson  
John D. Jackson

DATE x 4-11-24

x Johnny Cydrus  
Johnny Cydrus

DATE x 4-11-24

BIDDER

NAME: W.E. Smith Construction

STREET: 2030 Bauer Rd

CITY: Blanchester, OH



The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

Project Name: **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)**

Date set for completion: **November 15, 2024**

**GENERAL SUMMARY**

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal				
					Unit Price Bid		Total Amount Bid		
					Dollars	Cents	Dollars	Cents	
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	3500	00	✓
202	38000	262.5	FT.	Guardrail Removed	20	00	5250	00	✓
203	10000	142	CU. YD.	Excavation	20	00	2840	00	✓
203	20000	110	CU. YD.	Embankment	20	00	2200	00	✓
606	15200	262.5	FT.	Guardrail, Type MGS Half Post Spacing with Long Posts, (Steel)	44	00	11550	00	✓
659	10000	310	SQ. YD.	Seeding and Mulching	15	00	4650	00	✓
659	20000	0.04	TON	Commercial Fertilizer	1000	00	40	00	✓
659	31000	0.07	ACRE	Lime	1000	00	70	00	✓
601	32200	4	CU. YD.	Rock Channel Protection, Type C With Filter	150	00	600	00	✓
605	14020	251	FT.	6" Base Pipe Underdrains with Geotextile Fabric	10	00	2570	00	✓
611	00510	32	FT.	6" Conduit, Type F for Underdrain Outlets	15	00	480	00	✓
204	10000	294	SQ. YD.	Subgrade Compaction	5	00	1470	00	✓
204	45000	0.1	HOUR	Proof Rolling	200	00	20	00	✓
252	01500	20	FT.	Full Depth Pavement Sawing	5	00	100	00	✓
301	46000	40	CU. YD.	Asphalt Concrete Base, PG64-22	320	00	12800	00	✓
304	20000	44	CU. YD.	Aggregate Base	60	00	2640	00	✓
407	10000	12	GAL.	Tack Coat	10	00	120	00	✓
411	10000	18	CU. YD.	Stabilized Crushed Aggregate	60	00	1080	00	✓
441	50000	10	CU. YD.	Asphalt Concrete Surface Course, Type 1, (448), PG64-22	340	00	3400	00	✓

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal				
					Unit Price Bid		Total Amount Bid		
					Dollars	Cents	Dollars	Cents	
441	50300	12	CU. YD.	Asphalt Concrete Intermediate Course, Type 2, (448)	340	00	4080	00 ✓	
626	00110	3	EACH	Barrier Reflector, Type 2 (Bi-Directional)	25	00	75	00 ✓	
507	00400	656	FT.	Steel Piles, Misc.: W18X40 Steel Beam	50	00	32800	00 ✓	
507	00410	2	EACH	Steel Piles, Misc.: W18X40 Steel Beam Splice	100	00	200	00 ✓	
524	94703	381	FT.	Drilled Shafts, 36" Diameter, Above Bedrock, As Per Plan	65	00	24765	00 ✓	
524	94705	220	FT.	Drilled Shafts, 36" Diameter, Into Bedrock, As Per Plan	250	00	55000	00 ✓	
524	94803	312	FT.	Drilled Shafts, 42" Diameter, Above Bedrock, As Per Plan	90	00	28080	00 ✓	
103	05000	LUMP	LUMP	Premium For Contract Performance Bond and for Payment Bond	LUMP	SUM	5000	00 ✓	
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	7500	00 ✓	
623	10000	LUMP	LUMP	Construction Layout Stakes and Surveying	LUMP	SUM	1500	00 ✓	
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	10000	00 ✓	
BID TOTAL							224320	00	✓ OK 5/20/24 esg

State total amount in words two hundred + twenty four thousand  
three hundred twenty Dollars and zero cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: May 20, 2024

\_\_\_\_\_  
Name and Address of President if bidder is a Corporation

\_\_\_\_\_  
Name and Address of Secretary if bidder is a Corporation

Name of Firm: W.E. Smith Construction

By: [Signature]

Title: President

Firm Address: 2030 Bauer Rd  
Blanchester, OH 45707

Tax I.D. # Omitted Fed. Tax ID #

JACKSON TOWNSHIP,  
COUNTY OF PIKE, OHIO

SLIP REPAIR

BID PROPOSAL

"JACKSON TOWNSHIP-HICKSON RUN ROAD SLIP REPAIR,  
PIK-TR516-01.47,  
FEMA #109124, PW#401, (DR4424)"

LETTING DATE

MAY 20, 2024

11:00 A.M.

*William M. Harbert*  
William M. Harbert

DATE: *4-11-24*

*John D. Jackson*  
John D. Jackson

DATE: *4-11-24*

*Johnny Cydrus*  
Johnny Cydrus

DATE: *4-11-24*

BIDDER

NAME: *Ohio-West Virginia Exc.Co.*

STREET: *PO Box 128*

CITY: *Powhatan Pt., OH 43942*



The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

Project Name: **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)**

Date set for completion: **November 15, 2024**

**GENERAL SUMMARY**

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	3,500	00 ✓
202	38000	262.5	FT.	Guardrail Removed	6.	00	1,575	00 ✓
203	10000	142	CU. YD.	Excavation	27.	00	3,834	00 ✓
203	20000	110	CU. YD.	Embankment	40.	00	4,400	00 ✓
606	15200	262.5	FT.	Guardrail, Type MGS Half Post Spacing with Long Posts, (Steel)	50.	00	13,125	00 ✓
659	10000	310	SQ. YD.	Seeding and Mulching	4.	00	1,240	00 ✓
659	20000	0.04	TON	Commercial Fertilizer	1,600	00	64.	00 ✓
659	31000	0.07	ACRE	Lime	240	00	16.	80 ✓
601	32200	4	CU. YD.	Rock Channel Protection, Type C With Filter	550	00	2,200	00 ✓
605	14020	251	FT.	6" Base Pipe Underdrains with Geotextile Fabric	40.	00	10,040	00 ✓
611	00510	32	FT.	6" Conduit, Type F for Underdrain Outlets	50.	00	1,600	00 ✓
204	10000	294	SQ. YD.	Subgrade Compaction	3.	00	882.	00 ✓
204	45000	0.1	HOUR	Proof Rolling	3,000	00	300.	00 ✓
252	01500	20	FT.	Full Depth Pavement Sawing	30.	00	600.	00 ✓
301	46000	40	CU. YD.	Asphalt Concrete Base, PG64-22	550	00	22,000	00 ✓
304	20000	44	CU. YD.	Aggregate Base	111.	00	4,884	00 ✓
407	10000	12	GAL.	Tack Coat	3.	00	36.	00 ✓
411	10000	18	CU. YD.	Stabilized Crushed Aggregate	159	00	2,862	00 ✓
441	50000	10	CU. YD.	Asphalt Concrete Surface Course, Type 1, (448), PG64-22	800	00	8,000	00 ✓

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal				
					Unit Price Bid		Total Amount Bid		
					Dollars	Cents	Dollars	Cents	
441	50300	12	CU. YD.	Asphalt Concrete Intermediate Course, Type 2, (448)	800.	00	9,600	00 ✓	
626	00110	3	EACH	Barrier Reflector, Type 2 (Bi-Directional)	14.	00	42.	00 ✓	
507	00400	656	FT.	Steel Piles, Misc.: W18X40 Steel Beam	36.	00	23,616	00 ✓	
507	00410	2	EACH	Steel Piles, Misc.: W18X40 Steel Beam Splice	1,281	00	2,562	00 ✓	
524	94703	381	FT.	Drilled Shafts, 36" Diameter, Above Bedrock, As Per Plan	137	00	52,197	00 ✓	
524	94705	220	FT.	Drilled Shafts, 36" Diameter, Into Bedrock, As Per Plan	200.	00	44,000	00 ✓	
524	94803	312	FT.	Drilled Shafts, 42" Diameter, Above Bedrock, As Per Plan	222	00	69,264	00 ✓	
103	05000	LUMP	LUMP	Premium For Contract Performance Bond and for Payment Bond	LUMP	SUM	4,800	00 ✓	
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	8,300	00 ✓	
623	10000	LUMP	LUMP	Construction Layout Stakes and Surveying	LUMP	SUM	3,500	00 ✓	
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	28,000	00 ✓	
BID TOTAL								327,039	80 ✓

OK  
5/20/24  
CSG



State total amount in words Three-Hundred Twenty Seven Thousand  
Thirty-Nine Dollars and Eighty cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: May 20th 2024

Brian Hendershot  
Name and Address of President if bidder is a Corporation

Kevin L. Winkler  
Name and Address of Secretary if bidder is a Corporation

Name of Firm: Ohio-WV Exc. Co.

By: [Signature]

Title: President



Firm Address: PO Box 128  
Powhatan Pt., OH 43942

Tax I.D. # Omitted Fed. Tax ID #  
Unique Entity # [Redacted]

Omitted Unique Entity # ✓ 17

JACKSON TOWNSHIP,  
COUNTY OF PIKE, OHIO

SLIP REPAIR

BID PROPOSAL

"JACKSON TOWNSHIP-HICKSON RUN ROAD SLIP REPAIR,  
PIK-TR516-01.47,  
FEMA #109124, PW#401, (DR4424)"

LETTING DATE

MAY 20, 2024

11:00 A.M.

*x* William M. Harbert  
William M. Harbert

DATE: 4-11-24

*x* John D. Jackson  
John D. Jackson

DATE: 4-11-24

*x* Johnny Cydrus  
Johnny Cydrus

DATE: 4-11-24

BIDDER

NAME: Alan Stone Co., Inc

STREET: 5519 Suite A Route 339

CITY: Vincent, Ohio 45784

The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

Project Name: **Jackson Township-Hickson Road Slip Repair, PIK-TR516-01.47, FEMA #109124, PW#401 (DR4424)**

Date set for completion: **November 15, 2024**

**GENERAL SUMMARY**

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	2,800	00 ✓
202	38000	262.5	FT.	Guardrail Removed	5	00	1,312	50 ✓
203	10000	142	CU. YD.	Excavation	25	00	3,550	00 ✓
203	20000	110	CU. YD.	Embankment	15	00	1,650	00 ✓
606	15200	262.5	FT.	Guardrail, Type MGS Half Post Spacing with Long Posts, (Steel)	50	00	13,125	00 ✓
659	10000	310	SQ. YD.	Seeding and Mulching	5	00	1,550	00 ✓
659	20000	0.04	TON	Commercial Fertilizer	650	00	26	00 ✓
659	31000	0.07	ACRE	Lime	900	00	63	00 ✓
601	32200	4	CU. YD.	Rock Channel Protection, Type C With Filter	400	00	1,600	00 ✓
605	14020	251	FT.	6" Base Pipe Underdrains with Geotextile Fabric	25	00	6,275	00 ✓
611	00510	32	FT.	6" Conduit, Type F for Underdrain Outlets	25	00	800	00 ✓
204	10000	294	SQ. YD.	Subgrade Compaction	8	00	2,352	00 ✓
204	45000	0.1	HOUR	Proof Rolling	2,400	00	240	00 ✓
252	01500	20	FT.	Full Depth Pavement Sawing	15	00	300	00 ✓
301	46000	40	CU. YD.	Asphalt Concrete Base, PG64-22	360	00	14,400	00 ✓
304	20000	44	CU. YD.	Aggregate Base	110	00	4,840	00 ✓
407	10000	12	GAL.	Tack Coat	5	00	60	00 ✓
411	10000	18	CU. YD.	Stabilized Crushed Aggregate	110	00	1,980	00 ✓
441	50000	10	CU. YD.	Asphalt Concrete Surface Course, Type 1, (448), PG64-22	620	00	6,200	00 ✓



Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
441	50300	12	CU. YD.	Asphalt Concrete Intermediate Course, Type 2, (448)	950	00	11,400	00 ✓
626	00110	3	EACH	Barrier Reflector, Type 2 (Bi-Directional)	15	00	45	00 ✓
507	00400	656	FT.	Steel Piles, Misc.: W18X40 Steel Beam	35	00	22,960	00 ✓
507	00410	2	EACH	Steel Piles, Misc.: W18X40 Steel Beam Splice	500	00	1,000	00 ✓
524	94703	381	FT.	Drilled Shafts, 36" Diameter, Above Bedrock, As Per Plan	120	00	45,720	00 ✓
524	94705	220	FT.	Drilled Shafts, 36" Diameter, Into Bedrock, As Per Plan	140	00	30,800	00 ✓
524	94803	312	FT.	Drilled Shafts, 42" Diameter, Above Bedrock, As Per Plan	130	00	40,560	00 ✓
103	05000	LUMP	LUMP	Premium For Contract Performance Bond and for Payment Bond	LUMP	SUM	2,000	00 ✓
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	7,500	00 ✓
623	10000	LUMP	LUMP	Construction Layout Stakes and Surveying	LUMP	SUM	5,500	00 ✓
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	20,000	00 ✓
BID TOTAL							250,608	50 ✓

OK  
CSG  
5/20/24

State total amount in words Two hundred fifty thousand, six hundred  
eight Dollars and fifty cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: May 20th, 2024

Claudia Staley 5519 Suite A Route 339 Vincent, Oh 45784

Name and Address of President if bidder is a Corporation

Blake Staley Vice President 5519 Suite A Route 339 Vincent, Oh 45784

Name and Address of Secretary if bidder is a Corporation

Name of Firm: Alan Stone Co., Inc

By: *Blk Staley*

Title: Vice President

Firm Address: 5519 Suite A Route 339

Vincent, Ohio 45784

Tax I.D. #

Omitted Fed. Tax  
ID #