

BID OPENING
February 12, 2024 @ 11:00 a.m.
“Left Fork Road Box Culvert”

[illegible]


ENGINEER’S ESTIMATE

Project Name: Left Fork Road Box Culvert, PIK-TR312-02.89


Date set for completion: October 1, 2024

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized			
					Unit Price		Total Amount	
					Dollars	Cents	Dollars	Cents
103	05000	LUMP	LUMP	Premium for Contract Performance Bond and for Payment Bond	LUMP	SUM	2,500	00
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	2,500	00
202	11001	LUMP	LUMP	Structure Removed, As Per Plan	LUMP	SUM	8,000	00
503	11100	LUMP	LUMP	Cofferdams and Excavation Bracing	LUMP	SUM	10,000	00
503	21301	LUMP	LUMP	Unclassified Excavation, As Per Plan	LUMP	SUM	7,500	00
509	10000	4,079	POUND	Epoxy Coated Reinforcing Steel	2	00	8,158	00
511	46010	15	CU. YD.	Class QC1 Concrete, Retaining/Wingwall Not Including Footing	1,500	00	22,500	00
511	46510	27	CU. YD.	Class QC1 Concrete, Footing	1,200	00	32,400	00
511	46610	2	CU. YD.	Class QC1 Concrete, Headwall	1,200	00	2,400	00
512	10100	37	SQ. YD.	Sealing of Concrete Surfaces (Epoxy-Urethane)	40	00	1,480	00
512	33000	57	SQ. YD.	Type 2 Waterproofing	30	00	1,710	00
512	33010	41	SQ. YD.	Type 3 Waterproofing	50	00	2,050	00
516	13600	47	SQ. FT.	1" Preformed Expansion Joint Filler	15	00	705	00
601	32004	96	CU. YD.	Rock Channel Protection, Type A with Geotextile Fabric, 3'-0" Thickness	150	00	14,400	00
606	17901	4	EACH	Guardrail Post, As Per Plan	500	00	2,000	00
611	97400	32.5	FT.	Conduit, Misc. : 8' Span x 6' Rise Conduit, Type A, 706.05, As Per Plan (Max. D.E.C. = 3'-0", Min. D.E.C. = 0'-6")	1,800	00	58,500	00

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized			
					Unit Price		Total Amount	
					Dollars	Cents	Dollars	Cents
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	3,000	00
623	10000	LUMP	LUMP	Construction Layout Stakes And Surveying, As Per Plan###	LUMP	SUM	2,500	00
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	10,000	00
D.E.C. = Design Earth Cover ### - Layout for Box Culvert is to be Accomplished by the Contractor Utilizing Coordinates Provided within this Project Plans <div>TOTAL ENGINEER'S ESTIMATE</div>							192,303	00



Denny T. Salisbury, P.E., P.S.
 Pike County Engineer



Date

COUNTY OF PIKE

ROAD IMPROVEMENTS

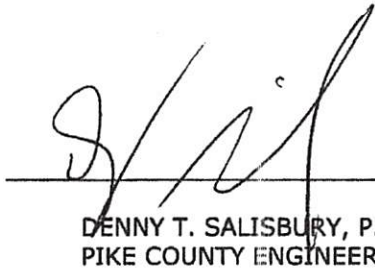
BRIDGE REPLACEMENT

BID PROPOSAL

"LEFT FORK ROAD BRIDGE REPLACEMENT,"
PIK-TR312-02.89

LETTING DATE

FEBRUARY 12, 2024

 DATE 1-9-24
DENNY T. SALISBURY, P.E., P.S.
PIKE COUNTY ENGINEER

BIDDER

NAME: Skeens Excavating, Inc.

STREET: 680 Great Meadow Rd.

CITY: Wheelerburg, OH. 45694.

BP-1

The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Left Fork Road Box Culvert, PIK-TR312-02.89** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

Project Name: **Left Fork Road Box Culvert, PIK-TR312-02.89**

Date set for completion: **October 1, 2024**

GENERAL SUMMARY

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
103	05000	LUMP	LUMP	Premium for Contract Performance Bond and for Payment Bond	LUMP	SUM	2,000	00 ✓
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	800	00 ✓
202	11001	LUMP	LUMP	Structure Removed, As Per Plan	LUMP	SUM	4,000	00 ✓
503	11100	LUMP	LUMP	Cofferdams and Excavation Bracing	LUMP	SUM	5,000	00 ✓
503	21301	LUMP	LUMP	Unclassified Excavation, As Per Plan	LUMP	SUM	8,000	00 ✓
509	10000	4,079	POUND	Epoxy Coated Reinforcing Steel	2	50	10,197.	50 ✓
511	46010	15	CU. YD.	Class QC1 Concrete, Retaining/Wingwall Not Including Footing	1,000	00	15,000	00 ✓
511	46510	27	CU. YD.	Class QC1 Concrete, Footing	1,000	00	27,000	00 ✓
511	46610	2	CU. YD.	Class QC1 Concrete, Headwall	1,000	00	2,000	00 ✓
512	10100	37	SQ. YD.	Sealing of Concrete Surfaces (Epoxy-Urethane)	50	00	1,850	00 ✓
512	33000	57	SQ. YD.	Type 2 Waterproofing	50	00	2,850	00 ✓
512	33010	41	SQ. YD.	Type 3 Waterproofing	50	00	2,050	00 ✓
516	13600	47	SQ. FT.	1" Preformed Expansion Joint Filler	10	00	470.	00 ✓
601	32004	96	CU. YD.	Rock Channel Protection, Type A with Geotextile Fabric, 3'-0" Thickness	180	00	17,280	00 ✓
606	17901	4	EACH	Guardrail Post, As Per Plan	750	00	3,000	00 ✓
611	97400	32.5	FT.	Conduit, Misc. : 8' Span x 6' Rise Conduit, Type A, 706.05, As Per Plan (Max. D.E.C. = 3'-0", Min. D.E.C. = 0'-6")	1,100	00	35,750	00 ✓

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	500	00 ✓
623	10000	LUMP	LUMP	Construction Layout Stakes And Surveying, As Per Plan###	LUMP	SUM	4,000	00 ✓
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	9,000	00 ✓
BID TOTAL								

D.E.C. = Design Earth Cover

- Layout for Box Culvert is to be Accomplished by the Contractor Utilizing Coordinates Provided within this Project Plans

150,747.50 ✓

OK
2/12/24
CSG

State total amount in words One Hundred, Fifty Thousand, Seven Hundred,
Forty - Seven Dollars and 50/100 cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: February 11th, 2024

Brennan Skeens- 4957A SR 522 Franklin Furnace, OH. 45629.

Name and Address of President if bidder is a Corporation

Tammy Skeens- 553 Great Meadow Rd. Wheelersburg, OH. 45694.

Name and Address of Secretary if bidder is a Corporation

Name of Firm: Skeens Excavating, Inc.

By: [Signature] Brennan Skeens

Title: VP

Firm Address: 680 Great Meadow Rd.
Wheelersburg, OH. 45694.

Tax I.D. #

Omitted Fed.
Tax ID#

COUNTY OF PIKE

ROAD IMPROVEMENTS


BRIDGE REPLACEMENT

BID PROPOSAL

"LEFT FORK ROAD BRIDGE REPLACEMENT,"
PIK-TR312-02.89

LETTING DATE

FEBRUARY 12, 2024

 DATE 1-9-24
DENNY T. SALISBURY, P.E., P.S.
PIKE COUNTY ENGINEER

BIDDER

NAME: Cooper's Excavating, LLC
STREET: 7251 Bethlehem Rd
CITY: Winchester

BP-1

The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Left Fork Road Box Culvert, PIK-TR312-02.89** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

Project Name: **Left Fork Road Box Culvert, PIK-TR312-02.89**

Date set for completion: **October 1, 2024**

GENERAL SUMMARY

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
103	05000	LUMP	LUMP	Premium for Contract Performance Bond and for Payment Bond	LUMP	SUM	20,000	00 ✓
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	5,000	00 ✓
202	11001	LUMP	LUMP	Structure Removed, As Per Plan	LUMP	SUM	4,000	00 ✓
503	11100	LUMP	LUMP	Cofferdams and Excavation Bracing	LUMP	SUM	500	00 ✓
503	21301	LUMP	LUMP	Unclassified Excavation, As Per Plan	LUMP	SUM	20,000	00 ✓
509	10000	4,079	POUND	Epoxy Coated Reinforcing Steel	2	25	9,177	75 ✓
511	46010	15	CU. YD.	Class QC1 Concrete, Retaining/Wingwall Not Including Footing	900	00	13,500	00 ✓
511	46510	27	CU. YD.	Class QC1 Concrete, Footing	475	00	12,825	00 ✓
511	46610	2	CU. YD.	Class QC1 Concrete, Headwall	1,000	00	2,000	00 ✓
512	10100	37	SQ. YD.	Sealing of Concrete Surfaces (Epoxy-Urethane)	65	00	2,405	00 ✓
512	33000	57	SQ. YD.	Type 2 Waterproofing	27	00	1,539	00 ✓
512	33010	41	SQ. YD.	Type 3 Waterproofing	50	00	2,050	00 ✓
516	13600	47	SQ. FT.	1" Preformed Expansion Joint Filler	2	50	117	50 ✓
601	32004	96	CU. YD.	Rock Channel Protection, Type A with Geotextile Fabric, 3'-0" Thickness	100	00	9,600	00 ✓
606	17901	4	EACH	Guardrail Post, As Per Plan	875	00	3,500	00 ✓
611	97400	32.5	FT.	Conduit, Misc. : 8' Span x 6' Rise Conduit, Type A, 706.05, As Per Plan (Max. D.E.C. = 3'-0", Min. D.E.C. = 0'-6")	1,200	00	39,000	00 ✓

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	2,000	00 ✓
623	10000	LUMP	LUMP	Construction Layout Stakes And Surveying, As Per Plan###	LUMP	SUM	1,000	00 ✓
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	10,000	00 ✓
					BID TOTAL		158,214	25 ✓

D.E.C. = Design Earth Cover

- Layout for Box Culvert is to be Accomplished by the Contractor Utilizing Coordinates Provided within this Project Plans

OK
2/12/24
CSG

State total amount in words One Hundred Fifty Eight Thousand, Two Hundred
Fourteen Dollars and Twenty Five cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: February, 9, 2024

Name and Address of President if bidder is a Corporation

Name and Address of Secretary if bidder is a Corporation

Name of Firm: Cooper's Excavating, LLC
By: Sam Cooper
Title: Owner

Firm Address: 7251 Bethlehem Rd
Winchester, OH 45697

Tax I.D. #

Omitted Fed. 21
Tax ID#

COUNTY OF PIKE

ROAD IMPROVEMENTS

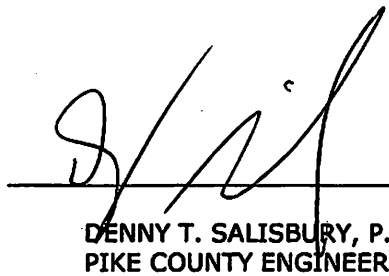
BRIDGE REPLACEMENT

BID PROPOSAL

"LEFT FORK ROAD BRIDGE REPLACEMENT,"
PIK-TR312-02.89

LETTING DATE

FEBRUARY 12, 2024

 DATE 1-9-24
DENNY T. SALISBURY, P.E., P.S.
PIKE COUNTY ENGINEER

BIDDER

NAME: Alan Stone Co., Inc.

STREET: 5519 Suite A State Route 339

CITY: Vincent, Ohio 45784

BP-1

The undersigned having full knowledge of the site, plans, and specifications for the project entitled **Left Fork Road Box Culvert, PIK-TR312-02.89** and the conditions of this proposal hereby agree to furnish all services, labor, materials, and equipment necessary to complete the entire project according to the plans, specifications, and completion dates, and to accept the unit prices specified below for each item as full compensation for the work included in this proposal.

Project Name: **Left Fork Road Box Culvert, PIK-TR312-02.89**

Date set for completion: **October 1, 2024**

GENERAL SUMMARY

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
103	05000	LUMP	LUMP	Premium for Contract Performance Bond and for Payment Bond	LUMP	SUM	1620.	00 ✓
201	11000	LUMP	LUMP	Clearing and Grubbing	LUMP	SUM	2700	00 ✓
202	11001	LUMP	LUMP	Structure Removed, As Per Plan	LUMP	SUM	3300	00 ✓
503	11100	LUMP	LUMP	Cofferdams and Excavation Bracing	LUMP	SUM	12,000	00 ✓
503	21301	LUMP	LUMP	Unclassified Excavation, As Per Plan	LUMP	SUM	25,000	00 ✓
509	10000	4,079	POUND	Epoxy Coated Reinforcing Steel	3	00	12,237	00 ✓
511	46010	15	CU. YD.	Class QC1 Concrete, Retaining/Wingwall Not Including Footing	1800	00	27,000	00 ✓
511	46510	27	CU. YD.	Class QC1 Concrete, Footing	1100	00	29,700	00 ✓
511	46610	2	CU. YD.	Class QC1 Concrete, Headwall	2700	00	5400	00 ✓
512	10100	37	SQ. YD.	Sealing of Concrete Surfaces (Epoxy-Urethane)	45	00	1665	00 ✓
512	33000	57	SQ. YD.	Type 2 Waterproofing	55	00	3135	00 ✓
512	33010	41	SQ. YD.	Type 3 Waterproofing	85	00	3485	00 ✓
516	13600	47	SQ. FT.	1" Preformed Expansion Joint Filler	3	00	141	00 ✓
601	32004	96	CU. YD.	Rock Channel Protection, Type A with Geotextile Fabric, 3'-0" Thickness	120	00	11,520	00 ✓
606	17901	4	EACH	Guardrail Post, As Per Plan	1700	00	6800	00 ✓
611	97400	32.5	FT.	Conduit, Misc. : 8' Span x 6' Rise Conduit, Type A, 706.05, As Per Plan (Max. D.E.C. = 3'-0", Min. D.E.C. = 0'-6")	1900	00	61,750	00 ✓

Item	Item Ext.	Estimated Quantity	Unit	Item Description	Itemized Proposal			
					Unit Price Bid		Total Amount Bid	
					Dollars	Cents	Dollars	Cents
614	11000	LUMP	LUMP	Maintaining Traffic	LUMP	SUM	2900	00 ✓
623	10000	LUMP	LUMP	Construction Layout Stakes And Surveying, As Per Plan###	LUMP	SUM	5000	00 ✓
624	10000	LUMP	LUMP	Mobilization	LUMP	SUM	11,000	00 ✓
					BID TOTAL		226353	.00 ✓

D.E.C. = Design Earth Cover

- Layout for Box Culvert is to be Accomplished by the Contractor Utilizing Coordinates Provided within this Project Plans

2/12/24
CSG

\$ 226,353.00

State total amount in words TWO HUNDRED TWENTY-SIX THOUSAND THREE
HUNDRED FIFTY THREE Dollars and ZERO cents.

Note: Quantities may be increased or decreased as directed by the Pike County Engineer.

Date: February 12th, 2024

Claudia Staley, 5519 Suite A State Route 339, Vincent, Ohio 45784

Name and Address of President if bidder is a Corporation

Blake Staley, 5519 Suite A State Route 339, Vincent, Ohio 45784

Name and Address of Secretary if bidder is a Corporation

Name of Firm: Alan Stone Co., Inc.

By: 

Title: Vice President

Firm Address: 5519 Suite A State Route 339

Vincent, Ohio 45784

Tax I.D. # 